


SplitMaster 26/30

Unbeatable for large volumes of timber and long-term performance.

- **Punch advance** Autospeed as standard
- **Max. billet length** 125 cm
- **Cylinder stroke** 130 cm
- **Max. billets/cycle** 8 pcs.
- **Splitting knife for 4 parts** as standard (optional Easy splitting knife)
- **Transportation** Three-point linkage
- **adjustable splitting stroke**
- **hydraulic splitting knife adjustment**
- **Special equipment** winch manual or radio-controlled
- **Construction according to EN 609-1**

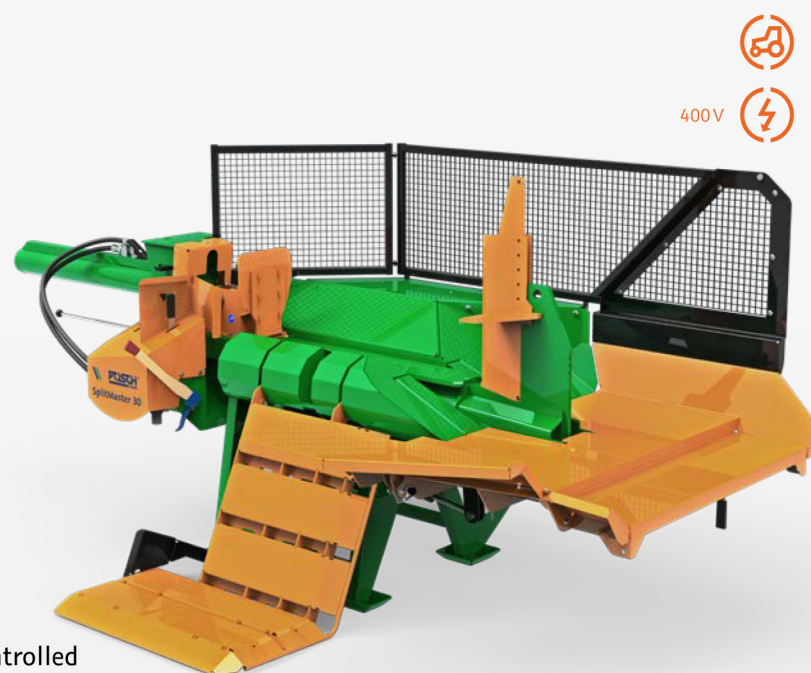

SplitMaster 30 with 4-blade knife in working position

SplitMaster 26/30

The powerful professional horizontal splitter for longer billets.

Article no.	Type	Drive	Advance speed max. cm/s	Return speed max. cm/s	Splitting power t	Weight kg
M8450NSG	PZG ^① SPEED	tractor PTO shaft, power consumption 28 kW at 300-480 rpm, built-in oil pump with max. capacity 64 l/min	· 15 · 33	28	26	~ 1,284
M8455NSG	E7,5D ^② SPEED	7.5 kW e-motor 400V, S6, CEE 16A, dual-stage pump	· 10 · 22	19	26	~ 1,238
M8460NSG	E15D ^② SPEED	15 kW e-motor 400V, S6, CEE 32A, dual-stage pump	· 11 · 23	20	26	~ 1,280
M8465NSG	PZG-E7,5D ^{①②} SPEED	· Tractor PTO shaft · 7.5 kW e-motor 400V, S6, CEE 16A, dual-stage pump	· 33 · 22	· 28 · 19	26	~ 1,341
M8470NSG	PZG-E15D ^{①②} SPEED	· Tractor PTO shaft · 15 kW e-motor 400V, S6, CEE 32A, 15/dual-stage pump	· 33 · 23	· 28 · 20	26	~ 1,380
M8450NG	PZG ^①	Tractor PTO shaft, power consumption 28 kW at 300-480 rpm, built-in oil pump with max. capacity 64 l/min	· 13 · 25	26	30	~ 1,280
M8455NG	E7,5D ^②	7.5 kW e-motor 400V, S6, CEE 16A, dual-stage pump	· 8 · 16	16	30	~ 1,238
M8460NG	E15D ^②	15 kW e-motor 400V, S6, CEE 32A, dual-stage pump	· 9 · 18	18	30	~ 1,280
M8465NG	PZG-E7,5D ^{①②}	· Tractor PTO shaft · 7.5 kW e-motor 400V, S6, CEE 16A, dual-stage pump	· 25 · 16	· 26 · 16	30	~ 1,341
M8470NG	PZG-E15D ^{①②}	· Tractor PTO shaft · 15 kW e-motor 400V, S6, CEE 32A, dual-stage pump	· 25 · 18	· 26 · 18	30	~ 1,380

① Tractor drive: universal shaft required, three-point linkage cat. II

② E-drive: with motor circuit breaker and phase inverter

Special equipment SplitMaster 26/30

Possible for initial equipment, prices incl. assembly.

Article no.	Name
Y	Surcharge SplitMaster with "Easy" splitting knife and lumber pick (no 4-way splitting knife)
C*	Oil cooler recommended for continuous operation (from 4 hours) or for use above 30°C outdoor temperature. Advantage: longer service life of the hydraulic components due to less wear.
FH*	Rope winch „750“, radio and manually operated, pulling force 750 kg (for longitudinal chassis 500 kg pulling force), rope 20 m, unlimited rope pulling speed. Retrofitting upon request (serial no. of machine required)
HW*	Rope winch "750" manually operated, pulling force 750 kg (with longitudinal chassis 500kg pulling force), rope 20 m, unlimited rope pulling speed. Retrofitting upon request (serial no. of machine required)

* 3-pin constant current connector 12 V from tractor required.

Accessory equipment SplitMaster 26/30

Handy accessory equipment for more power and convenience for wood processing.

Article no.	Name
F0003141	Splitting knife "Easy" with lumber pick
F0003074	2-way splitting knife
F0003075	4-way splitting knife (ø 0–50 cm)**, standard
F0003044	6-way splitting knife (ø 15–50 cm)**, Weight 63 kg
F0003069	8-way splitting knife (ø 15–50 cm)**, Weight 69 kg
Z2000653	Walterscheid W-Line universal shaft
F0004131	Log support extension to split short logs
F0004130	Hand pump (manual) for central pressure piece lubrication
F0004148	Gripper tongs with torsional spring to rope winch, log ø up to 65 cm. Weight ~7.6 kg
F0004149	Gripping tongs with coil spring to rope winch, up to log ø 80 cm. Weight ~8.8 kg
F0002605	Chain for cable puller, 1 m, 2-log hauling hook for 1,000 kg
F0004150	Light unit, attachable
F0001806	Hour counter for machines with PTO drive, includes rpm display
F0002179	Hour counter for machines with E-drive
F0004288	Retrofitting kit safety kit for SplitMaster models N/NS (3-point version, e.g. item no. M845NS) to be used by several people, consisting of three grids, grid bracket, widened timber support as well as safety valve (according to EN 609-1)
F0004289	Retrofitting kit safety kit for SplitMaster models NST/NT (longitudinal chassis version, e.g. item no. M845NST) to be used by several people, consisting of three grids, grid bracket, widened timber support as well as safety valve (according to EN 609-1)


** log diameter for centred splitting

Winch



The optional rope winch helps you process even the largest logs quickly and in an efficient manner. Article no. FH and HW

Central lubrication with hand pump

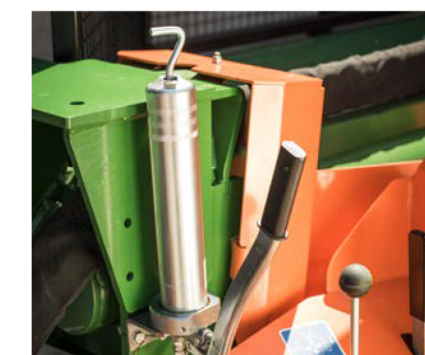

For optimum and efficient maintenance: Optional hand pump (manual) for pressure piece lubrication. Article no. F0004130

Oil cooler



The optional oil cooler ensures safe continuous operation. Article no. C