

EXCAVATOR MULCHERS

PML/EX



from 35 to 85 L/min



Ø6 cm max



from 5,5 to 7,5 t

MULCHER WITH HAMMER/FLAIL ROTOR FOR EXCAVATORS.

This mulcher can be equipped with a standard 27cc motor or an optional 38cc motor to mount to excavators ranging from 5.5 to 7.5 tons. There is also an optional 17/34cc variable manual displacement hydraulic motor with mechanical adjustment that makes this model ideal for any excavator.

The flow control valve ensures an easy and rapid mounting of the mulcher without adjustments or modifications to the hydraulic system of the excavator.




STANDARD EQUIPMENT

- Enclosed machine body
- Belt transmission
- 27cc gear motor with integrated anticavitation valve - (35 - 65 L/min)
- Hydraulic hoses
- Flow control system valve (only with 27 cc and 38 cc motors)
- Rear hood with mechanic adjustment
- Welded counter blade
- Rear roller
- Possibility to have the rotor equipped with PML hammers or Y-fails

OPTIONS

- 38cc gear motor with integrated anticavitation valve - (75 - 85 L/min)
- 17/34cc variable manual displacement hydraulic piston motor with relief and anticavitation valve - (35 - 75 L/min)
- Customized attachment bracket
- Attachment plate with self leveling device
- Multiple tooth options

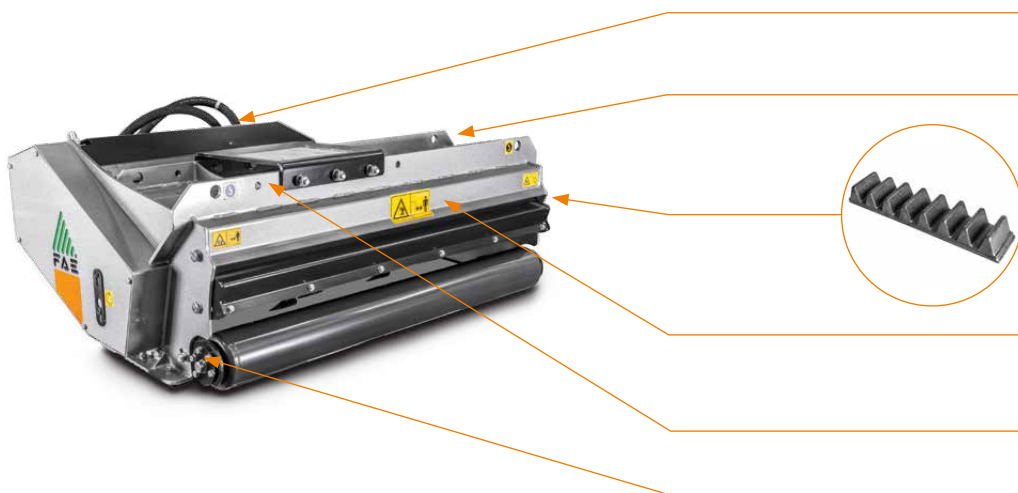

Hydraulic hoses

Various types of hydraulic motors

to adapt to different models of excavators

Steel counter-blades

helps mulch material into a smaller final size

Flow control system valve

to protect the motor from excessive flow

Anti dust machine body

Self-cleaning support roller

MODEL	Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. teeth	
	min	max	min	max	min	max				PML	Y
PML/EX 100	35	65	180	210	5,5	7,5	1015	290	60	16	16
PML/EX 125	35	65	180	210	6,0	7,5	1255	320	60	20	20
PML/EX 150	35	65	180	210	6,5	7,5	1495	350	60	24	24

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.